


SISALATION® MULTIPURPOSE LD (439) AND EHD (456)

Description


The Sisalation® Multipurpose products are designed to comply with the requirements of AS/NZS 4200.1. The blue coloured face of the product minimises the level of glare experienced during installation. The proprietary design and manufacturing techniques employed in the development of Sisalation® Multipurpose products accounts for their superior strength.

Product Composition

Sisalation® Multipurpose LD (439)

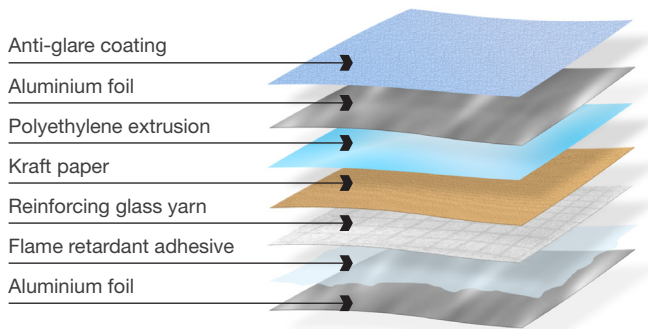

Sisalation® Multipurpose EHD (456)

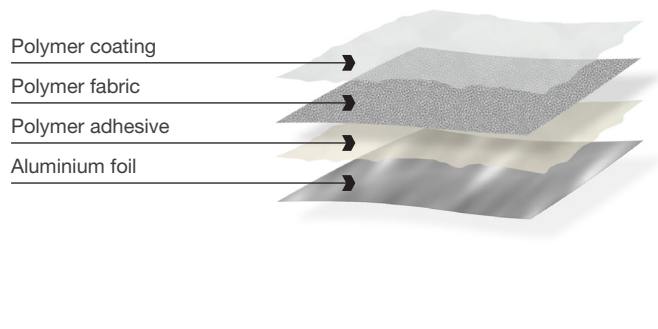

Application

Sisalation® Multipurpose 456 EHD is designed for use as a pliable building membrane in the following applications such as brick veneer walls, residential tile roofs (with the exception of slate) and residential metal roofs (where it can be installed under the battens). Sisalation® Multipurpose LD is specifically designed for use on residential brick veneer, metal walls and metal roof applications. Sisalation® Multipurpose products are specifically designed for external wall applications in Climate Zone 2–5 and in suitable roofing applications in all climate zones.

When overlapped and sealed with Vapastop® 883 aluminium foil tape, Sisalation® Multipurpose products provide a tough secondary skin for vapour and moisture control and act as a wind, heat and dust barrier. The effective barrier also protects the building frame by minimising the amount of rain and dust that penetrates.

Product Data

| Product | Width mm | Length m | Area per roll m ² | Weight per roll kg | Product Code |
|------------------------------------|----------|----------|------------------------------|--------------------|--------------|
| Sisalation® Multipurpose LD (439) | 1350 | 60 | 81.00 | 19.70 | 950260 |
| Sisalation® Multipurpose EHD (456) | 1350 | 30 | 40.50 | 9.70 | 952330 |
| | | 60 | 81.00 | 19.40 | 952360 |
| | 1500 | 30 | 45.00 | 10.80 | 952331 |

Physical Properties

| Property | | Test Method/ Standard | Test Result LD (439) | Test Result EHD (456) | Unit |
|--------------------------------|-----------------|--------------------------|-------------------------|-------------------------|------|
| Duty Classification | | AS4200 | Light Duty | Extra Heavy Duty | |
| Edge Tear | Machine | TAPPI T470 | ≥ 45 | ≥ 90 | N |
| | Lateral | | ≥ 45 | ≥ 90 | N |
| Tensile Strength | Machine | AS 1301.448s | ≥ 7.5 | ≥ 13.0 | kN/m |
| | Lateral | | ≥ 4.5 | ≥ 10.5 | kN/m |
| Vapour Control | | ASTM E96 | Class 1 Vapour Barrier | Class 1 Vapour Barrier | |
| Water Control | | AS/NZS 4201.4 | Water Barrier | Water Barrier | |
| Emittance | Anti-glare face | AS/NZS 4201.5 | IR Non-reflective (0.9) | IR Non-reflective (0.9) | |
| | Silver side | | IR Reflective (0.03) | IR Reflective (0.03) | |
| Resistance to Dry Delamination | | AS/NZS 4201.1 | PASS | PASS | |
| Resistance to Wet Delamination | | AS/NZS 4201.2 | PASS | PASS | |
| Shrinkage | | AS/NZS 4201.3 | ≤ 0.5 | ≤ 0.5 | % |
| Electrical Conductivity | | AS/NZS 3100 | Electrically Conductive | Electrically Conductive | |
| Nominal Thickness | | | < 1.0 | < 1.0 | mm |

Fire Hazard Properties

Sisalation® Multipurpose LD (439) and EHD (456) exhibit the following characteristics when tested in accordance with the following standards:

| Property | Test Method/Standard | Result |
|--------------------------------|----------------------|-----------|
| Flammability Index (AS 1530.2) | AS/NZS 1530.2 | ≤ 5 (Low) |

Compliance

Sisalation® Multipurpose LD (439) and EHD (456) products comply with the National Construction Code (NCC) for sarking type materials and satisfy the following requirements:

- AS/NZS4200.1 for 'Pliable Building Membranes' Deemed to Satisfy Standard, recognised by NCC Volumes 1 and 2.
- NCC 2019 Volume 1 Non-Combustible building elements C1.9(e) (vi) Sarking-type materials that do not exceed 1mm in thickness and have a Flammability Index not greater than 5. NCC 2019 Volume 2 General Concession – Non-Combustible Materials 3.7.1.1 (f) Sarking-type materials that do not exceed 1mm in thickness and have a Flammability Index not greater than 5.
- Suitable for use in bushfire areas with a Bushfire Attack Level (BAL) Low-FZ in accordance with AS 3959.

Environmental properties

Fletcher Insulation avoids the use of Ozone Depleting Potential (ODP) substances in the manufacture or composition of its FBS-1 Glasswool Bio-Soluble Insulation® and Sisalation® reflective foil products.

The use of Sisalation® pliable building membranes guarantees the use of zero ODP insulation while also ensuring that no harmful levels of Volatile Organic Compounds (VOCs) are released. This allows the incorporation of environmentally preferable insulation whilst also maintaining indoor air quality.

Important Notes

- Sisalation® pliable building membrane products must be kept dry, out of contact with direct sunlight and out of contact with alkaline products, cement and mortar as well as corrosive environments such as chlorine.
- Sisalation® pliable building membrane products are not designed to withstand weathering hence the external cladding should be applied without delay.
- Sisalation® pliable building membrane products shall be installed in accordance with AS/NZS 4200.2 'Pliable Building Membranes and Underlays – Installation Requirements for Metal Roofs, Tile Roofs and Walls'. Additional guidelines are available for download via www.insulation.com.au or by contacting Fletcher Insulation on 1300 654 444.
- Building Designer to consider the suitability of this product based on the projects design requirements.

Specification Notes

When specifying, state the following:

The wall wrap material shall be Fletcher Insulation Sisalation® Multipurpose _____ (specify LD 439 or EHD 456).

© Fletcher Insulation Pty Limited 2020. Fletcher Insulation reserves the right to change product specifications without prior notification. Information in this publication and otherwise supplied to users as to the subject product is based on our general experience and is given in good faith, but because of the many particular factors which are outside our knowledge and control and affect the use of products, no warranty is given or is to be implied with respect to either such information or the product itself, in particular the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended application. Unless otherwise stated all ™ and ® are trademarks and registered trademarks of Fletcher Insulation Pty Limited ABN 72 001 175 355. FTDS7_Revision_2_ Issue Date 15102020.

For more information call 1300 654 444
email info@insulation.com.au or web www.insulation.com.au

 **SISALATION**
The Original and The Best