

Sisalation® Foam Cell Multipurpose LT


Description

Sisalation® Foam Cell Multipurpose LT is a 3-in-1 multipurpose sarking solution. It is an Extra Heavy Duty sarking material consisting of a foam core laminated between layers of reflective foil, with an anti-glare coating for installation safety.

Application

Sisalation® Foam Cell Multipurpose LT is specifically designed for use in wall and roof applications. It is ideal for use in residential and certain commercial applications where a vapour barrier is desired and a fire rated group number is not essential.

Product composition

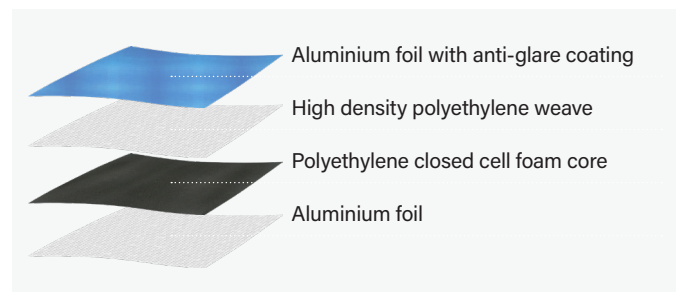

Features and benefits

Easy installation	→	Produced in rolls that are easy to move and install.
150mm wide flap	→	Can be installed without the need for tape, saving time and cost.
R0.2 Thermal Resistance	→	Acts as a thermal break for steel frames.
Australian made	→	Supporting local manufacture.

Product data

Nominal thickness mm	Width mm	Overlap/flap mm	Length m	Area per roll m ²	Nominal weight per roll kg	Old product code	New product code
8.4	1350	150	22.25	30	18	395273	4006747

Physical properties

Property	Test method/Standard	Result/Classification	Unit
Thermal Resistance R-value	AS/NZS 4859.1	R0.2	m ² K/W
Emittance	Reflective face	AS/NZS 4201.5	IR Reflective (0.03)
	Anti-glare face	AS/NZS 4201.5	IR Semi-Reflective (0.14)
Duty Classification	AS/NZS 4200.1 Table 1	Extra Heavy	
Vapour Control	AS/NZS 4200.1	Class 2 Vapour Barrier	
Water Control	AS/NZS 4201.4	Water Barrier	
Vapour Permeance	ASTM E96	< 0.1429	µg/Ns
Electrical Conductivity	AS/NZS 3100	Electrically Conductive	
Shrinkage	AS/NZS 4201.3	≤ 0.5	%
Resistance to dry delamination	AS/NZS 4201.1	Pass	
Resistance to wet delamination	AS/NZS 4201.2	Pass	

Fire hazard properties

Sisalation® Foam Cell Multipurpose LT exhibits the following characteristics when tested in accordance with the following:

Property	Test method/Standard	Result
Flammability Index	AS/NZS 1530.2	≤ 5 (Low)
Early Fire Hazard Indices	AS/NZS 1530.3	
Ignitability Index		0
Spread of Flame Index		0
Heat Evolved Index		0
Smoke Developed Index		1
BAL Compliance	AS 3959	Roof: Low-40 Wall: Low-FZ

Thermal performance

The thermal performance of Sisalation® Foam Cell Multipurpose LT varies with application, orientation and installation method. Please find thermal system properties in the below table.

Thermal system properties

The following table provides indicative Total R-value calculations based on typical systems. To determine the Total R-value for a broader range of system types, contact the Fletcher Insulation Technical team at technical@insulation.com.au

	Pitched metal roof	Double brick cavity wall
Heat Flow In (Summer)	R2.1	R1.7
Heat Flow Out (Winter)	R1.3	R1.7

Pitched metal roof based on 22.5° pitch with 40mm unventilated air gap, Sisalation® Foam Cell Multipurpose LT, unventilated roof space and 10mm flat plasterboard ceiling.

Double brick cavity wall based on 110mm clay brick, 20mm unventilated air space both sides and Sisalation® Foam Cell Multipurpose LT.

Health and safety

Sisalation® Foam Cell Multipurpose LT contains aluminium foil and can conduct electricity. To avoid electrocution, care should be taken to ensure products do not come into contact with electrical wiring during installation or use. Sisalation® Foam Cell Multipurpose LT contains no substances which at their given concentration, are hazardous to health. Refer to SUIIS for more information.

Environmental properties

No ozone depleting substances are used in the manufacture or composition of Sisalation® Foam Cell Multipurpose LT. Specification of Sisalation® Foam Cell Multipurpose LT provides the use of ODP free insulation while also ensuring that no harmful levels of Volatile Organic Compounds (VOCs) are released. This allows for the incorporation of environmentally preferable insulation whilst also maintaining indoor air quality.

Technical specification

When specifying, please state the following: The insulation shall be Sisalation® Foam Cell Multipurpose LT with a Material R-value of R0.2 and an Extra Heavy Duty rating in accordance with AS/NZS 4200.1. Supplied by Fletcher Insulation, the insulation material shall be installed in accordance with Fletcher Insulation installation guidelines available for download via www.insulation.com.au

© Fletcher Insulation Pty Limited 2024. Fletcher Insulation reserves the right to change product specifications without prior notification. Information in this publication and otherwise supplied to users as to the subject product is based on our general experience and is given in good faith, but because of the many particular factors which are outside our knowledge and control and affect the use of products, no warranty is given or is to be implied with respect to either such information or the product itself, in particular the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended application. The colour PINK, Pink® and Pink Batts® are registered trademarks of Owens Corning Intellectual Capital, LLC used under licence by Fletcher Insulation. FBS-1 Glasswool Bio-Soluble Insulation® is a registered trademark of ICANZ. Unless otherwise stated, all ™ and ® are trademarks and registered trademarks of Fletcher Insulation Pty Limited ABN 72 001 175 355. FTDS22_Revision_7_Issue Date 230524.