

Commercial & Roofing Catalogue

Revision 9 September 2026



Contents

Introduction

Trusted Solutions: Fletcher Insulation	3
--	---

National Construction Code

NCC Deemed-to-Satisfy	4
NCC 2022 Deemed-to-Satisfy	5
NCC 2025 Deemed-to-Satisfy	6

Underslab

Pink® Thermal Slab	7
Pink® NoiseSTOP™ with Durasorb® Facing	8
Permastop® Building Blanket	9

Wall Insulation

Pink® Partition	10–11
Rockwool® Safe 'n' Silent Pro	12
Rockwool® Rainscreen	13
Pink® Batts: Wall	14
Fletcher Protect® Party Wall Batts	15
Fletcher Protect® Party Wall Foil Faced Blanket	16

Wall Wrap

Sisalation® Tuff Wrap® Wall Wrap	17
Sisalation® Vapawrap® Residential Wall Wrap	18

Roof Sarking & Building Membranes

Sisalation® Metal Roof Sarking	19
Sisalation® Vapawrap® Vapour Permeable Metal Roof	20
Sisalation® Multipurpose EHD (456)	21
Sisalation® Foam Cell Multipurpose	22
Sisalation® Foam Cell Shed Liner	23
Sisalation® Facing Foils	24

Roofing Blanket

Pink® Building Blanket	25
Permastop® Building Blanket	26
Permastop® Tropic Building Blanket	27
Resituff™ Building Blanket	28
Permatuff™ Building Blanket	29
Pink® EmberGuard® Building Blanket	30

Ceiling Insulation

Pink® Batts: Ceiling	31
Pink® SonoMatt Blanket®	32

Roofing Ancillary

Safety Mesh	33
Roof Razor®	34

Acoustic Barriers

Quadzero™ Loaded Vinyl Barrier	35
Soundlag 4525C Pipe Acoustic Lagging	36

Tapes

Vapastop® 883 Foil Tape	37
Plain Foil Tape	37
3M Seaming Tape	37

Compliance and Design Assistance	38
----------------------------------	----

Get in touch with us	39
----------------------	----


The Fletcher Insulation Commercial & Roofing Catalogue has been designed to be used in conjunction with our Product Selection Guides for understanding best suited product in application as well as our Technical Data Sheet for product performance, standards compliance and specification for best practice methods for installing Fletcher Insulation products. The catalogue is not designed to be used for understanding how product performs in application or technically, rather a comprehensive guide of the range of insulation available at Fletcher Insulation, along with product codes for ease of reference and or selection.

Introduction

Trusted Solutions: Fletcher Insulation

With one of Australia's widest distribution and sales coverage networks, Fletcher Insulation® provides energy efficient and acoustic solutions to the residential, commercial, HVAC and industrial markets. We manufacture and distribute a wide range of insulation products specially designed for Australian thermal and acoustic systems.

At the forefront of innovation and development of cost effective and compliant products, we remain committed to offering valuable service to our customers. Our national sales force has the experience and knowledge to provide assistance for any project or development to meet non-combustibility, acoustic, energy efficiency and condensation management performance requirements.

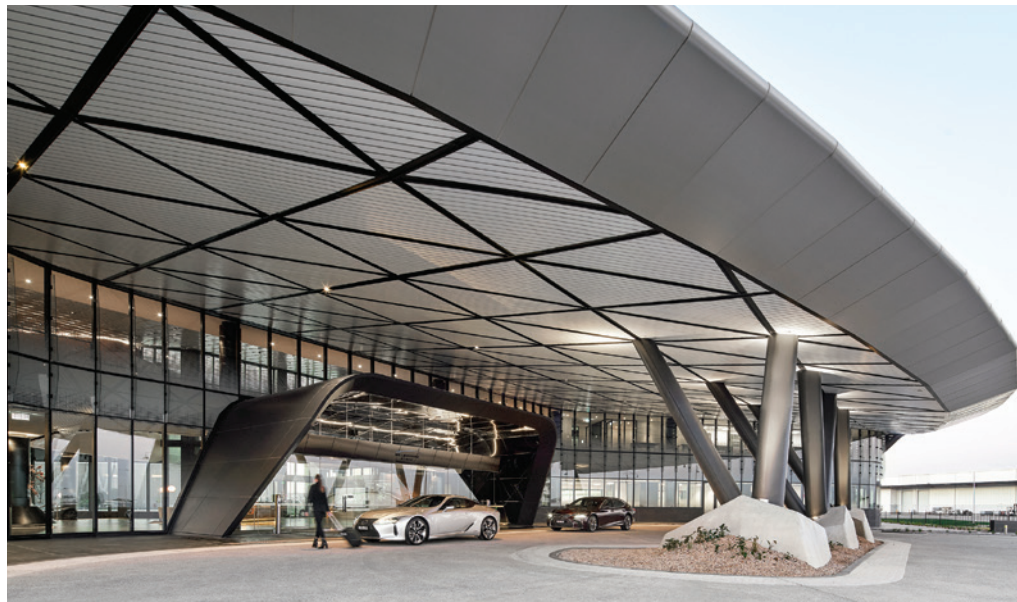

The commercial market

The market for insulation in the commercial building sector demands products that enable buildings to meet stringent requirements as set out in the National Construction Code (NCC) for thermal, acoustic and fire performance. Fletcher Insulation provides tested and proven insulation products, from Permastop® Building Blanket used in metal roofing and Sisalation® Building Membranes for roofing and wall applications, to partition wall insulation or suspended slab and specialist acoustic insulation applications.

National Construction Code


NCC Deemed-to-Satisfy

Australia has a varied climate, leading to different locations around the country having different heating and cooling requirements. To account for these differences the energy efficiency Deemed-to-Satisfy Provisions vary from location to location and for simplicity, locations with approximately similar climates have been combined into eight climate zones.

The following provides a brief description of each NCC climate zone:

Climate zone 1	High humidity summer, warm winter	Climate zone 5	Warm temperate
Climate zone 2	Warm humid summer, mild winter	Climate zone 6	Mild temperate
Climate zone 3	Hot dry summer, warm winter	Climate zone 7	Cool temperate
Climate zone 4	Hot dry summer, cool winter	Climate zone 8	Alpine

These eight climate zones are illustrated below in the form of a climate zone map which was created using Bureau of Meteorology climatic data with two supplementary zones added to accommodate an additional temperate zone and alpine area. The climate zone boundaries are also aligned with local government areas and are therefore subject to change from time to time.

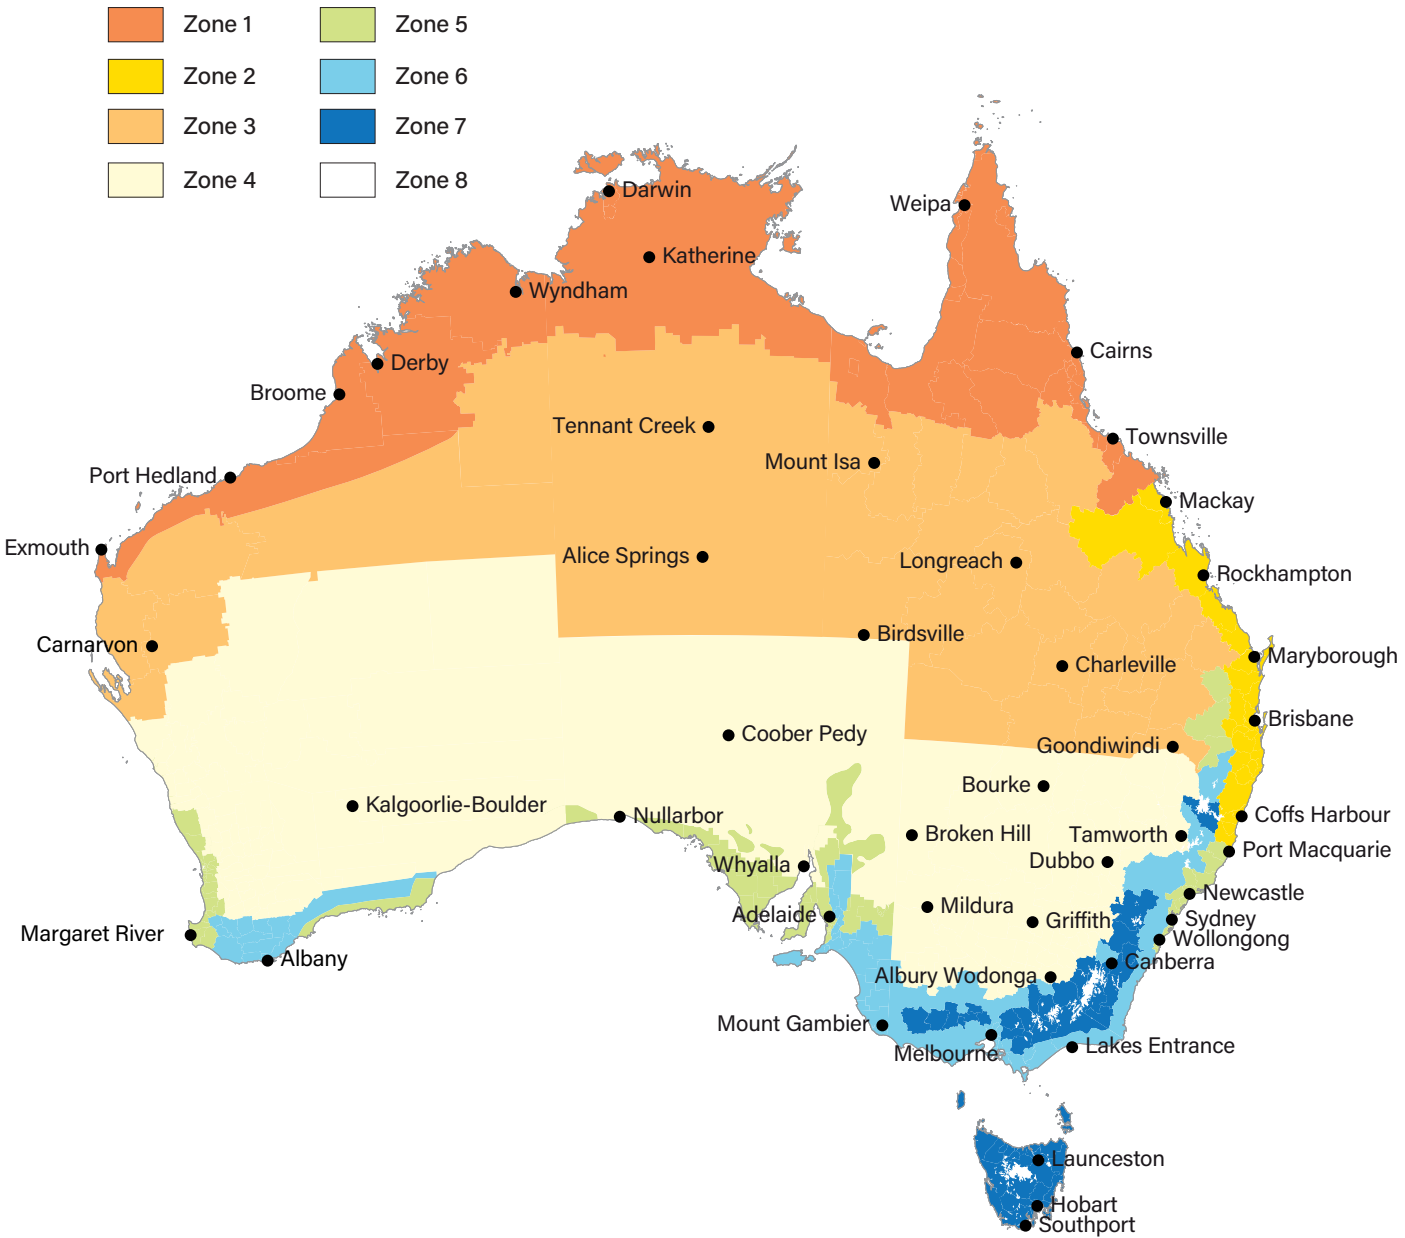

National Construction Code

NCC 2022 Deemed-to-Satisfy insulation for commercial class 2 to 9 buildings

Building classes 2 and 4 must collectively achieve an average energy rating of not less than 7 stars and individually achieve an energy rating of not less than 6 stars. For sole-occupancy units of class 2 and 4 buildings requirements, refer to J3D7 and J3D8.

Table 1: Roofs and Ceilings Ref: NCC Vol 1 Table J4D4(1)

Options	Minimum System R-value for climate zones:							
	For the downward direction of heat flow						For the upward direction of heat flow	
	1	2	3	4	5	6	7	8
i. A roof or ceiling with a roof upper surface solar absorptance value of not more than 0.45	3.7	3.7	3.7	3.7	3.7	3.2	3.7	4.8

Concessions and variations apply. Refer NCC 2022 Vol.1 Section J. Climate zones (1, 2, 3, 4, 5, 6 and 7) solar absorptance on the upper surface of the roof must not be more than 0.45 (NCC 2022 J4D4(2)).

Table 2: External Walls Ref: NCC Volume 1 Table J4D6a

For walls: the total wall-glazing system U value must meet the requirements set in J4D6(1) and (4) wall components of a wall-glazing construction must achieve a minimum Total R-value of: i. Where the wall is less than 80% of the area of the wall-glazing construction, R1.0; or ii. Where the wall is 80% or more of the area of the wall-glazing construction, the value specified in Table J4D6a								
Options	Minimum System R-value for climate zones:							
	1	2	3	4	5	6	7	8
i. Class 2 common area, Class 5, 6, 7, 8 or 9a building or class 9a building other than a ward area	2.4	1.4	1.4	1.4	1.4	1.4	1.4	1.4
ii. Class 3 or 9c building or Class 9a ward area	3.3	1.4	3.3	2.8	1.4	2.8	2.8	3.8

Concessions and variations apply. Refer NCC 2022 Vol.1 Section J.

Table 3: Floors Ref: NCC 2022 Vol 1 Table J4D7

Options	Minimum System R-value for climate zones:							
	For the upward direction of heat flow				For the downward direction of heat flow			
	1	2	3	4	5	6	7	8
i. A floor without an in-slab heating or cooling system	2.0	2.0	2.0	2.0	2.0	2.0	2.0	3.5
ii. A floor with an in-slab heating or cooling system	3.25	3.25	3.25	3.25	3.25	3.25	3.25	4.75

Concessions and variations apply. Refer NCC 2022 Vol.1 Section J.

A sub-floor space with not more than 150% of the required sub-floor ventilation is considered enclosed.

Note to Table J4D7: For the purpose of calculating the Total R-Value of a floor, the sub-floor and soil R-Value must be calculated in accordance with Specification 39 or Section 3.5 of CIBSE Guide A.

National Construction Code

NCC 2025 Deemed-to-Satisfy insulation for commercial class 2 to 9 buildings

Building class 2, Section J is replaced with Section J of NCC 2022 Amendment 2. For building class 4 refer to NCC 2025 Section J, Part J3.

Table 1: Roofs and Ceilings Ref: NCC Vol 1 Table J4D4(1)(a,b)

Options	Minimum System R-value for climate zones:							
	For the downward direction of heat flow						For the upward direction of heat flow	
	1	2	3	4	5	6	7	8
(a) for a Class 5, 6, 7, 8 or 9b building or a Class 9a building other than a ward area	3.7	3.7	3.7	3.7	3.7	3.2	3.7	4.8
(b) for a Class 3 or 9c building or a Class 9a ward area	4.8	4.4	4.8	4.8	3.7	4.8	5.3	5.3

Concessions and variations apply. Refer NCC 2025 Vol.1 Section J4D4 (2), (3) & (4) for upper roof surface requirements to comply with DTS provisions.

Table 2: External Walls Ref: NCC Volume 1 Table J4D6b

For walls: the total wall-glazing system U value must meet the requirements set in J4D6(1) and (4) wall components of a wall-glazing construction must achieve a minimum Total R-value of:

- Where the wall is less than 80% of the area of the wall-glazing construction, R1.0; or
- Where the wall is 80% or more of the area of the wall-glazing construction, the value specified in Table J4D6b

Options	Minimum System R-value for climate zones:							
	1	2	3	4	5	6	7	8
i. Class 2 common area, Class 5, 6, 7, 8 or 9a building or class 9a building other than a ward area	3.0	1.0	2.2	2.0	1.0	1.2	2.2	3.6
ii. Class 3 or 9c building or Class 9a ward area	4.0	1.0	2.4	1.9	1.0	1.0	2.2	3.6

Concessions and variations apply. Refer NCC 2022 Vol.1 Section J.

Table 3: Floors Ref: NCC 2022 Vol 1 Table J4D7

Options	Minimum System R-value for climate zones:							
	For the upward direction of heat flow				For the downward direction of heat flow			
	1	2	3	4	5	6	7	8
i. A floor without an in-slab heating or cooling system	2.0	2.0	2.0	2.0	2.0	2.0	2.0	3.5
ii. A floor with an in-slab heating or cooling system	3.25	3.25	3.25	3.25	3.25	3.25	3.25	4.75

Concessions and variations apply. Refer NCC 2022 Vol.1 Section J.
A sub-floor space with not more than 150% of the required sub-floor ventilation is considered enclosed.

Note to Table J4D7: For the purpose of calculating the Total R-Value of a floor, the sub-floor and soil R-Value must be calculated in accordance with Specification 39 or Section 3.5 of CIBSE Guide A.

Underslab

Pink® Thermal Slab

Designed for

use in commercial soffit applications where thermal properties are pivotal in controlling temperature fluctuations of concrete roofs, floors and walls.

Made from

lightweight composite of up to 80% recycled glass using a thermosetting resin forming a semi rigid board faced with a Sisalation® reflective foil laminate adhered to one side.



Product information


- Codemark Certified for AS 4859.1 Thermal Performance
- Provides exceptional acoustic performance
- Achieves AS 5637.1 Group 1 NCC fire classification

- NRC Sound Absorption results are available on the Technical Data Sheet
- Faced with industry leading Sisalation® foil
- Resistance to bacteria and micro-organism growth

Product stock and availability: Minimum order quantities and lead times may apply. Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Facing	Material R-value	Nominal thickness mm	Width mm	Length mm	Pieces per pack	m ² per sheet	Product code
Sisalation® 450 Facing Foil Heavy Duty (HD)	R1.5	50	1200	2400	5	14.4	4005602
	R2.0	68	1200	2400	3	8.64	4005605
	R2.2	75	1200	2400	3	8.64	4005603
	R3.0	100	1200	2400	2	5.76	4005604

Pink® NoiseSTOP™ with Durasorb® Facing

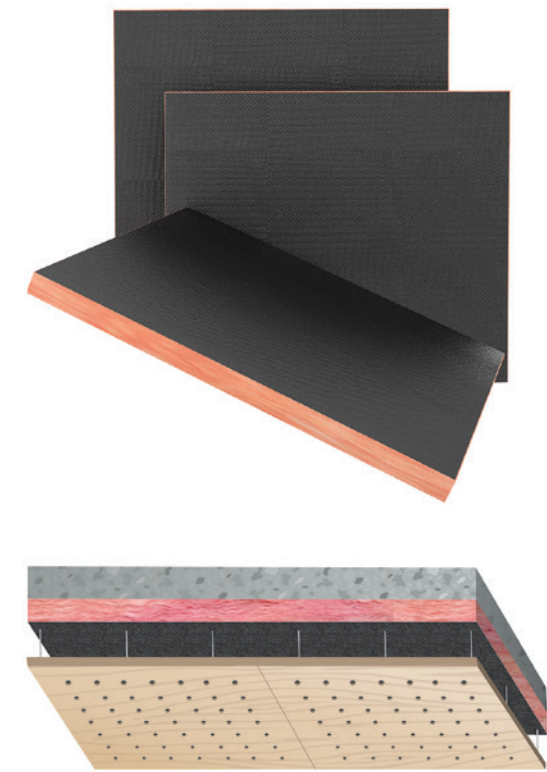

Designed for use in commercial concrete ceiling, floor and wall applications requiring thermal performance, acoustic control and where a black aesthetic finish is required.
It is also suitable for installation behind perforated linings to provide acoustic absorption and to conceal the substrate behind the metal lining for an enhanced visual appearance.

Made from lightweight composite of up to 80% recycled glass using a thermosetting resin forming a semi rigid board faced with a 100% non-woven black polyester fabric adhered to one side.

Product information

- 32kg density
- Codemark Certified for AS 4859.1 Thermal Performance
- Aesthetically pleasing, non-opaque spun bonded black finish with an embossed pattern
- Provides exceptional acoustic performance ideal for providing privacy between offices, boardrooms, shops etc
- Ideal thermal properties for controlling temperature fluctuations of concrete roofs, floors and walls
- Resistance to bacteria and micro-organism growth

Product stock and availability: Minimum order quantities and lead times may apply. Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.


Material R-value	Thickness mm	Width mm	Length mm	Pieces per pack	Coverage per pack m ²	Product code
R1.5	50	1200	2400	5	14.4	4006987
R2.2	75	1200	2400	3	8.6	4006988
R3.0	100	1200	2400	2	5.76	4006991

Install using matching tape

Product	Width mm	Length m	Rolls per carton	Product code
Pink® NoiseSTOP™ Durasorb® Tape	70	50	16	4006808

Underslab

Permastop® Building Blanket

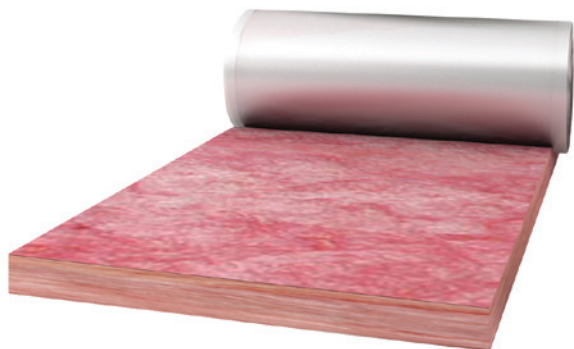

Designed for use in commercial underslab applications where aesthetics is not critical and where the soffit insulation will be installed behind a ceiling and/or wall lining. Acting as a water and vapour barrier to provide thermal and acoustic control for concrete soffit applications.

Made from Pink® Building Blanket (up to 80% recycled glass) faced with Sisalation® reflective facing foil (available in Medium and Heavy Duty) adhered to one side.

Product information

- Delivering very good thermal performance and acoustic control
- The bulk glasswool insulation component of Permastop® insulation installed against the concrete slab provides a damping effect to reduce reverberation noise
- The foil facing provides an effective water and vapour barrier for condensation control in under slab applications
- Reduces sound transfer between floors
- NRC Sound Absorption results are available on the Technical Data Sheet


Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Facing	Material R-value	Thickness mm	Width mm	Length mm	m ² per roll	Product code
Sisalation® 430 Facing Foil Medium Duty (MD) 150mm lap	R1.3	55	1200	15	18	4005793
	R1.4	60	1200	15	18	4004325*
	R1.8	75	1200	15	18	4005712
	R2.5	100	1200	10	12	4005719
	R3.0	130	1200	10	12	4005631
	R3.2	130	1200	10	12	4005622
	R3.6	130	1200	6.5	7.8	4005626
Sisalation® 450 Facing Foil Heavy Duty (HD) 150mm lap	R1.3	55	1200	15	18	4005614
	R1.4	60	1200	15	18	4004326*
	R1.8	75	1200	15	18	4005616
	R2.5	100	1200	10	12	4005619
	R3.0	130	1200	10	12	4005633
	R3.2	130	1200	10	12	4005625
	R3.6	130	1200	6.5	7.8	4005627

*Available in QLD only

Wall Insulation

Pink® Partition

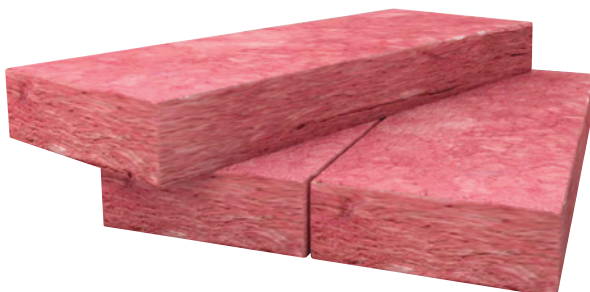

Designed for thermal and acoustic insulation for walls and ceilings to suit metal stud constructions, available in a range of densities.

Made from lightweight, flexible and resilient up to 80% recycled glass.

Product information

- Codemark Certified for AS 4859.1 Thermal Performance
- Meets AS 1530.1 for Non-Combustibility
- Batt sizes specifically designed to suit commercial steel frame construction but can be trimmed down for timber frame construction
- Reduces sound transfer from the external environment into the building or between adjacent rooms
- Assists with achieving excellent Rw and Rw+Ctr ratings
- Recover to their nominal thickness, fast
- Pre-cut batts are friction fitted and will remain in place without slumping for continual thermal performance
- Comfortable to handle during installation
- Safe to use with allergy sufferers due to low VOC

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Density	Material R-value m ² K/W	Nominal thickness mm	Width mm	Length mm	Pieces per pack	Coverage per pack m ²	Pieces per bale	Product code
Pink® Partition (11kg)	R1.2	50	450	1200	32	17.28	5	4006003
		50	600	1200	32	23.04	5	4006005
		50	600	2700	16	25.92	4	4006006
	R1.8	75	450	1200	16	8.64	6	4006007
		75	600	1200	16	11.52	6	4006009
		75	600	2700	16	25.92	4	4006010
	R2.1	90	450	1200	16	8.64	5	4006011
		90	450	2700	24	29.16	4	4006012
		90	600	1200	16	11.52	5	4006013
	R2.5	110	450	1200	16	8.64	5	4006017
		110	600	1200	16	11.52	5	4006015
	R3.5	165	450	1200	10	5.74	5	4008200
		165	600	1200	10	7.20	5	4008199

Wall Insulation

Density	Material R-value m ² K/W	Nominal thickness mm	Width mm	Length mm	Pieces per pack	Coverage per pack m ²	Pieces per bale	Product code
Pink® Partition (14kg)	R1.3	50	450	1200	24	12.96	5	4006021
		50	600	1200	24	17.28	5	4006023
	R1.9	75	450	1200	16	8.64	5	4005951
		75	450	2700	18	21.87	4	4005952
		75	600	1200	16	11.52	5	4005953
		75	600	2700	12	19.44	4	4005954
	R2.2	90	450	1200	14	7.56	5	4005957
		90	600	1200	14	10.08	5	4005959
Pink® Partition (22kg)	R4.2	150	600	1200	5	3.6	5	4020971
Pink® Partition (24kg)	R0.7	25	600	2700	20	32.40	4	4006087
	R1.1	38	600	2700	12	19.44	4	4006088
	R1.4	50	600	1200	12	8.64	5	4006025
		50	600	2700	12	19.44	4	4008195
	R2.1	75	450	1200	10	5.40	4	4006026
		75	600	1200	10	7.20	4	4006027
	R2.5	90	600	1200	8	5.76	4	4006029
	R2.8	100	450	1200	6	3.24	4	4006030
		100	600	1200	6	4.32	4	4006031
Pink® Partition (32kg)	R1.5	50	450	1200	12	6.48	5	4006033
		50	600	1200	15	8.64	5	4006034
	R2.2	75	450	1200	8	4.32	4	4008123
		75	600	1200	8	5.76	4	4008122
	R2.7	90	450	1200	8	4.32	4	4005948
		90	600	1200	8	5.76	4	4005949
	R3.0	100	600	1200	6	4.32	4	4005950

Wall Insulation

Rockwool® Safe 'n' Silent Pro



Designed for wall partition applications in hospitals, cinemas, schools, offices and residential and industrial buildings. It may be used for metal stud partitions for easy installation, and keeps its shape over time without sagging or slumping in the wall cavity.

Made from volcanic stone, a safe and sustainable material that continues to perform throughout the lifetime of the building.

Product information

- Simple and fast installation
- No sagging/slumping, rigidity lasts for a lifetime of a building
- Water repellent and moisture resistant
- Non-combustible and fire safe

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Product	Material R-value m ² K/W	Nominal thickness mm	Width mm	Length mm	Pieces per pack	Coverage per pack m ²	Product code
Rockwool® Safe 'n' Silent Pro330 40kg/m ³ density	0.7	25	600	1200	12	8.64	4020288
	1.35	50	600	1200	8	5.76	4007191
	1.75	64	600	1200	5	3.6	4007192
	2.05	75	600	1200	4	2.88	4007193
	2.45	90	600	1200	4	2.88	4007194
	2.7	100	600	1200	4	2.16	4007195
Rockwool® Safe 'n' Silent Pro350 60kg/m ³ density	0.7	25	600	1200	12	8.64	4007196
	1.45	50	600	1200	6	4.32	4007197*
	1.85	65	600	1200	5	3.6	4007198*
	2.15	75	600	1200	4	2.88	4007199
	2.55	90	600	1200	3	2.16	4007200*
	2.85	100	600	1200	3	2.16	4007201
Rockwool® Safe 'n' Silent Pro370 80kg/m ³ density	0.75	25	600	1200	12	8.64	4007202
	1.45	50	600	1200	6	4.32	4007203
	1.9	64	600	1200	5	3.6	4007204
	2.2	75	600	1200	4	2.88	4007205
	2.65	90	600	1200	3	2.16	4007206
	2.95	100	600	1200	3	2.16	4007207
Rockwool® Safe 'n' Silent Pro380 100kg/m ³ density	0.75	25	600	1200	12	8.64	4007208
	1.45	50	600	1200	6	4.32	4007209
	1.9	64	600	1200	5	3.6	4007210
	2.2	75	600	1200	4	2.88	4007211
	2.65	90	600	1200	3	2.16	4007212
	2.95	100	600	1200	3	2.16	4007213

*Stocked product

Wall Insulation

Rockwool® Rainscreen



Designed for ventilated façades (double-skin facades or rainscreens) to help temperature regulation in building, protect against water intrusion and reduce external noise.

Made from volcanic stone, a safe and sustainable material that continues to perform throughout the lifetime of the building.

Product information

- Contributes thermal comfort and building energy efficiency
- Moisture repellent whilst allowing the structure to maintain breathability and dryness
- Compatible with range of cladding attachment systems – easily fitted around brackets and other components
- When panels are tightly butted the adjacent slabs effectively 'knit' together providing a continuous insulating layer
- Non-combustible, does not develop toxic smoke and has a 1000oC melting point
- FBS-1 stone wool insulation – safe to use

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Product	Density kg/m ³	Material R-value m ² K/W	Nominal thickness mm	Width mm	Length mm	Pieces per pack	Coverage per pack m ²	Product code
Rockwool® Rainscreen SL950	80	0.70	25	600	1200	12	8.64	4010536*
	80	0.85	30	600	1200	10	7.2	4010537
	80	1.10	38	600	1200	8	4.32	4010538
	80	1.45	50	600	1200	6	4.32	4010539*
	80	2.15	75	600	1200	4	2.88	4010540
	80	2.55	90	600	1200	3	2.16	4010541
	80	2.85	100	600	1200	3	2.16	4010542
	80	3.55	125	600	1200	2	1.44	4010543
	80	3.70	125	600	1200	2	1.44	4010551
Rockwool® Rainscreen SL960	100	0.75	25	600	1200	12	8.64	4010544
	100	0.90	30	600	1200	10	7.2	4010545
	100	1.10	38	600	1200	8	4.32	4010546
	80	1.45	50	600	1200	6	4.32	4010547
	100	2.20	75	600	1200	4	2.88	4010548
	100	2.65	90	600	1200	3	2.16	4010549
	100	2.95	100	600	1200	3	2.16	4010550

*Stocked product

Wall Insulation

Pink® Batts: Wall



Designed for thermal insulation of walls in Class 9 low rise commercial building applications including schools, universities, aged care and child care buildings. It is the trusted choice when it comes to constructing new homes or retrofitting existing buildings.

Made from lightweight, flexible and resilient up to 80% recycled glass.

Product information

- Codemark Certified for AS 4859.1 Thermal Performance
- Non-combustible in accordance with AS/NZS 1530 Part 1
- Recover to their nominal thickness, fast
- Batts are friction fitted and will remain in place without slumping for continual thermal performance
- Comfortable to handle during installation
- Safe to use with allergy sufferers due to low VOC

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Frame type	Material R-value	Thickness mm	Width mm	Length mm	m ² per pack	Coverage per pack m ²	Batts per pack	Packs per bale	Product code
Timber	R1.5	70	430	1160	11.97	13.29	24	6	4006277
		70	580	1160	16.15	17.92	24	6	4006278
	R2.0	90	430	1160	11.97	13.29	24	5	4006093
		90	580	1160	16.15	17.92	24	5	4006094
	R2.0HD	70	430	1160	5.99	6.8	12	6	4006279
		70	450	1200	6.4	6.4	12	6	4021074
		70	580	1160	8.07	8.96	12	6	4006280
		70	600	1200	8.6	8.6	12	6	4006281
	R2.5HD	90	430	1160	5.99	6.64	12	5	4006071*
		90	580	1160	8.07	8.96	12	5	4006072*
	R4.0HD	140	430	1160	2.49	2.80	5	5	4021220 [#]
		140	580	1160	3.36	3.78	5	5	4021241 [#]
Steel	R2.0HD	70	600	1200	8.6	8.6	12	6	4006281
	R2.5HD	90	450	1200	6.4	6.4	12	5	4020595*
		90	600	1200	8.6	8.6	12	5	4006069*
WA Only	R2.5HD	90	430	1160	6.98	7.85	14	5	4020917 [^]
		90	580	1160	8.74	9.83	13	5	4021149 [^]

* These products may not be available in WA. Please contact Fletcher Insulation for confirmation.

[^] These product codes are only available in WA and do not have Codemark certification. Refer to codes above for all other states.

[#] Awaiting Codemark

Wall Insulation

Fletcher Protect® Party Wall Batts



Designed for fire rated building elements, such as party or separating walls between adjacent tenancies in Class 1 buildings. Provides protection from the spread of fire and also offers acoustic benefits of reducing flanking noise between adjoining properties.

Made from non-combustible stone wool.

Product information


- Non-combustible in accordance with AS/NZS 1530 Part 1
- Easy to cut and install into tight spaces
- Provide excellent resistance to shrinkage at high temperatures
- Acoustic properties reduce flanking noise between properties
- Bio-soluble stone wool

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location.

Thickness mm	Width mm	Length mm	Density kg/m ³	Pieces per pack	Product code
50	300mm x 2	1200	40	8	4010579
100	168	1200	60	10	4021102

Install example

Typical party wall and common wall application

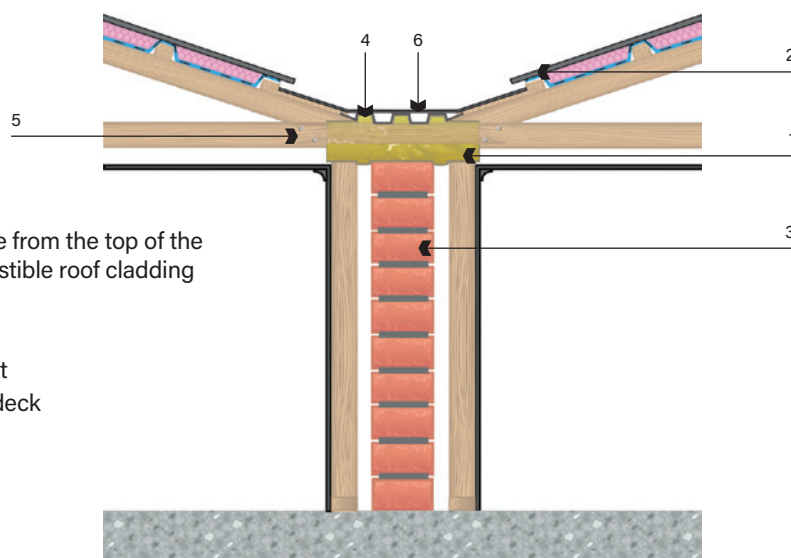

1. Party Wall Batts are compressed in place from the top of the FRL wall to the underside of non-combustible roof cladding
2. Non-combustible roof cladding
3. FRL rated wall
4. Metal deck (Spandek) box gutter support
5. Compliant roof batten to support metal deck
6. Metal box gutter

See page 38 for accessories.

Wall Insulation

Fletcher Protect® Party Wall Foil Faced Blanket



Designed for fire rated building elements, such as party or separating walls between adjacent tenancies in Class 1 buildings. Provides protection from the spread of fire and also offers acoustic benefits of reducing flanking noise between adjoining properties.

Made from non-combustible stone wool


Product information

- 60kg/m³ density
- Non-combustible in accordance with AS/NZS 1530 part 1
- Bio soluble stone wool
- Acoustic properties reduce flanking noise between properties
- Provides excellent resistance to shrinkage at high temperatures
- Foil faced for easy handling, cutting and installation

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location.

Thickness mm	Width mm	Length m	Pieces per pack	Qty per pallet	Product code
50	300	5	4	4	4021101

Install example

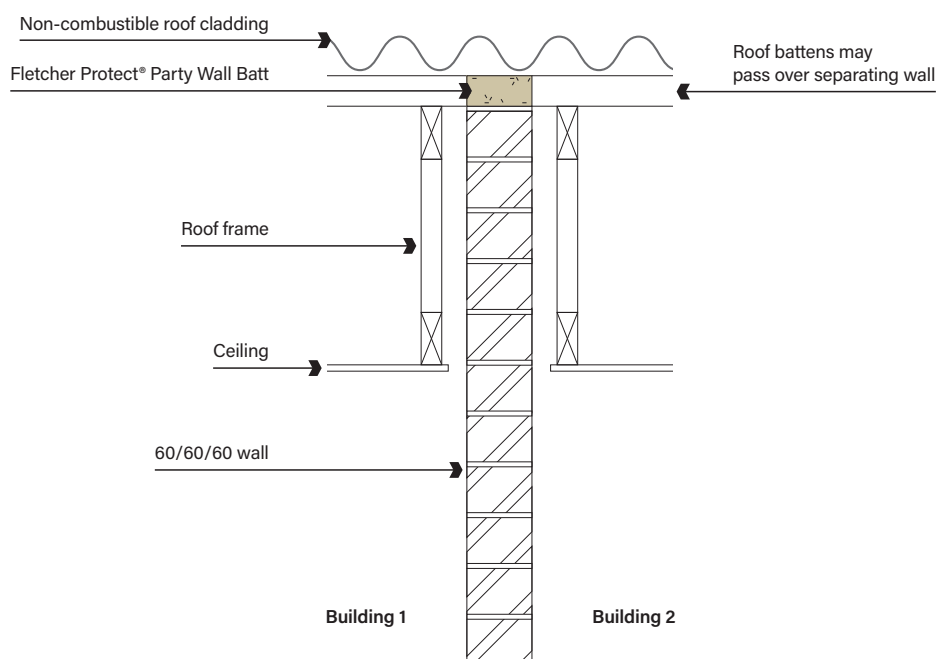

Wall Wrap

Sisalation® Tuff Wrap® Wall Wrap



Designed for use as a vapour and water barrier wall wrap for timber and steel framed walls and gables which assists in minimising draughts enabling bulk insulation to perform more effectively. The 'Breather' variant is better suited for use behind brick veneer. The breather variant is also more suitable when a degree of permeability is required in the external wall.

Made from a layer of reflective foil bonded to a polymer-based weave.

Product information

- Designed to protect buildings by reflecting 95% of radiant heat
- Incorporates an anti-glare coating on one side for added installation safety
- Minimises the amount of moisture absorbed by the frame during construction
- Exceptional strength to weather and tearing
- Class 3 Vapour Permeable allows water vapour to pass through and allow for drying and assist in prevention of mould and mildew
- Use with Vapastop® 883 Reinforced Foil Tape, for secure joins


It is important that the cladding manufacturer's requirements are referred to when determining the suitability of Sisalation® 497 Tuff Wrap® Wall Wrap.

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Product	Width mm	Length m	m ² per roll	Roll weight kg	Product code
Sisalation® Tuff Wrap® Wall Wrap Standard (497)	1350	30	40.5	4.3	4006915
	1350	60	81	9	4006917
Sisalation® Tuff Wrap® Wall Wrap Breather (497)	1350	30	40.5	4.3	4006916
	1350	60	81	9	4006914

Installation example

Steel frame wall with Sisalation® Tuff Wrap® Wall Wrap

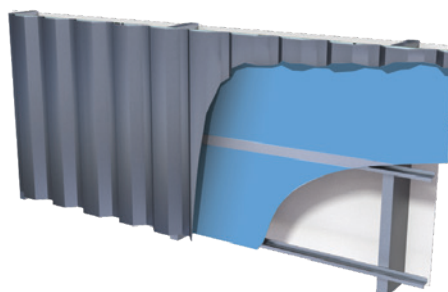

Wall Wrap

Sisalation® Vapawrap® Residential Wall Wrap



Designed for use in colder regions (climate zones 4–8) as a vapour permeable membrane in residential and suitable commercial walls to allow for vapour transfer and also act as a water barrier for condensation management.

Provides superior protection against damaging winds and heavy rain which can penetrate through exterior cladding and roofing material. Sisalation® Vapawrap® Vapour Permeable Residential Wall Wrap will keep water out, allowing moisture vapour inside the structure to escape.

Made from a water resistant non-woven fabric.


Product information

- Class 4 vapour permeable flexible membrane
- High resistance to water and is perfectly suited for residential buildings with high permeable, water vapour transfer requirements
- Allows water vapour to escape from buildings through walls, reducing the potential of condensation and mould growth
- Can be exposed to UV for between 30 days and up to 90 days, depending on the product chosen, which allows for internal building work to commence before external cladding is installed.
- Meets flammability requirement of ≤ 5 , as per AS/NZ1530.2 and suitable for use in bush fire areas with BAL (Bushfire Attack Level) of Low-FZ
- Use with 3M Seaming Tape (product code 4006809) to ensure all wall wrap joints are sealed

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Product	Width mm	Length m	m ² per roll	Nominal weight per roll kg	Product code
VP4-30	1350	30	40.5	4.7	4021556
VP4-30	1500	30	45	5.2	4021557
VP4-90	1350	30	40.5	4.7	4021549
VP4-90	1500	30	45	5.2	4021550

Install example Lightweight cladding

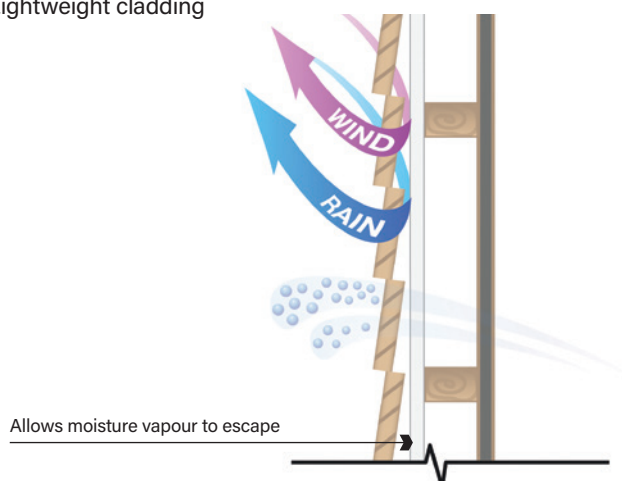

Roof Sarking & Building Membranes

Sisalation® Metal Roof Sarking



Designed for use as a roof sarking in commercial metal roof construction.

Made from double sided reflective aluminum foil one side with an anti-glare coating, double layered high density kraft paper. HD option is reinforced by yarn.


Product information

- Strong, tear and scratch resistant
- The foil-paper composition reduces the risk of noise generated in metal roofs
- Incorporates an anti-glare coating on one side for added installation safety
- Minimises draughts, thereby allowing bulk wall insulation to perform more effectively

***Product stock and availability:** Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Product	Width mm	Length m	m ² per roll	Roll weight kg	Product code
Sisalation® Metal Roof MD (433)	1350	30	40.5	6.36	4001421
	1350	60	81	12.43	4021390
Sisalation® Metal Roof HD (453)	1350	60	81	14.86	4021547

Install example Commercial metal clad roof with Sisalation® Metal Roof sarking

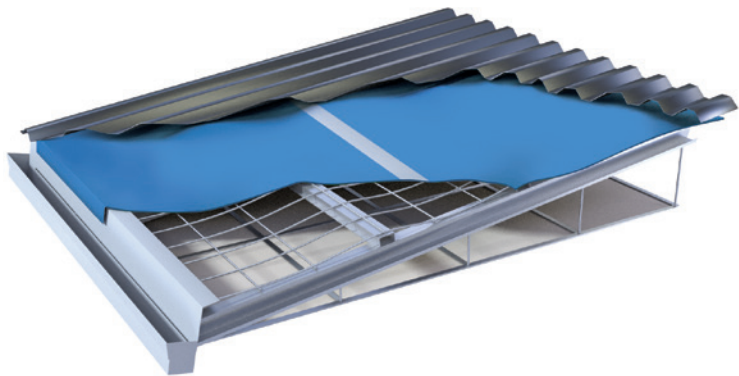

Roof Sarking & Building Membranes

Sisalation® Vapawrap® Vapour Permeable Metal Roof



Designed for use in Australia's colder climate zones, and where a vapour permeable sarking is required. Suitable for commercial and residential metal roofs and walls (where a higher duty wall membrane is required).

Provides a secondary skin against liquid water, wind and dust penetration. The effective vapour permeance also protects the building frame by minimising the accumulation of interstitial condensation.

Made from a resilient non-woven fabric.


Product information

- High vapour permeance helps water vapour escape buildings, working to reduce the chance of condensation
- Build-up that may result in mould growth
- High tensile strength will resist damage from minor point loads or equipment during installation of roof sheeting
- Flexible and lightweight which makes it easy to install and speeds up installation time
- Use with 3M Seaming Tape (4006809) to ensure all wall wrap joints are sealed

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Width mm	Length m	m ² per roll	Roll weight kg	Product code
1350	30	40.5	4.8	4006885

System example

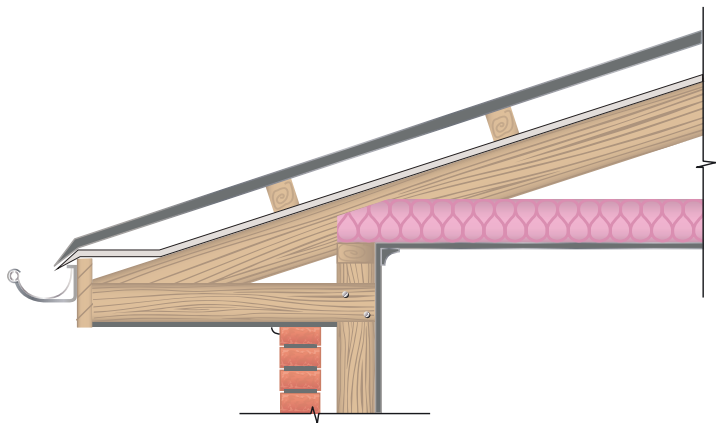

Roof Sarking & Building Membranes

Sisalation® Multipurpose EHD (456)



Designed for use as a pliable building membrane in applications such as brick veneer walls, tile roofs (with the exception of slate) and metal roofs (where it can be installed under the battens). Sisalation® Multipurpose products are specifically designed for external wall applications in climate zones 1–3 and in suitable roofing applications in all climate zones.

Made from a layer of aluminium foil bonded to a polymer-based weave.


Product information

- Dual purpose – may be used as a wall wrap and/or metal roof sarking
- Satisfies Bushfire Attack Level (BAL) requirements of Low-40 in roof applications and Low-FZ in wall applications (in accordance with AS 3959–2018)
- Incorporates an anti-glare coating on one side for added install safety
- Superior strength to weather and tearing
- Use with Vapastop® 883 Reinforced Foil Tape, for secure joins

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Width mm	Length m	m² per roll	Roll weight kg	Product code
1350	30	40.50	4.85	4006736
1350	60	81.00	9.43	4006738
1500	30	45.00	5.39	4006737

Installation example Commercial metal clad roof with Sisalation® Multipurpose EHD (456)

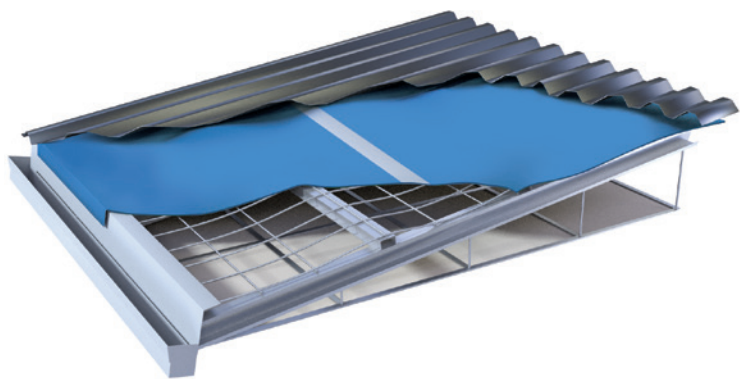

Roof Sarking & Building Membranes

Sisalation® Foam Cell Multipurpose



Designed for use as a 3-in-1 multipurpose insulation, vapour barrier and thermal break solution for steel framed wall and roof construction, to reduce the thermal bridging and conductivity between building elements. It is commonly also used in timber framed roof construction for added insulative properties.


Made from a closed cell, cross-linked XPE foam core encapsulated between two layers of low emissivity reflective laminate, one side with an anti-glare coating.

- Product information**
- AS 5637.1 Group 2 fire hazard property rating
 - Suitable for use as a thermal break for steel framed constructions in accordance with NCC requirements
 - Includes a 150mm foil flap to maximise coverage and minimise taping
 - Incorporates an anti-glare coating on one side for added installation safety
 - Aids in the prevention of condensation
 - Maximum durability and increased tear resistance
 - Allows for easy and rapid installation
 - Use with Vapastop® 883 Reinforced Foil Tape, for secure joins

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Material R-Value	Thickness mm	Width mm	Overlap mm	Length m	m² per roll	Product code
R0.2	8.4	1350	150	22.25	30	4006742

Installation example Commercial metal clad roof with Sisalation® Foam Cell Multipurpose

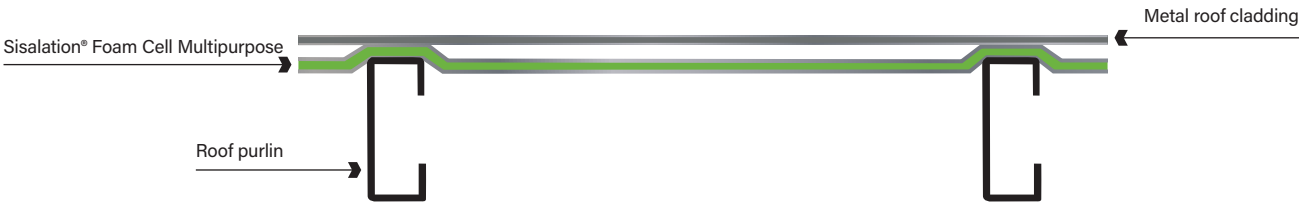

Roof Sarking & Building Membranes

Sisalation® Foam Cell Shed Liner



Designed for use in wall and roof applications in non-habitable residential sheds and garages.

Made from a closed cell, cross-linked XPE foam core encapsulated between two layers of low emissivity reflective laminate, one side with an anti-glare coating.

Product information

- Provides thermal performance reflecting up to 95% radiant heat, allowing for cooler internal conditions in hot and humid climates
- Assists in condensation management in roof spaces
- Rated as Extra Heavy Duty (EHD), providing maximum strength and durability
- Minimal foam memory allowing for easy and rapid installation
- Includes a 150mm foil flap to maximise coverage and minimise taping
- Use with Vapastop® 883 Reinforced Foil Tape, for secure joins

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location.

Width mm	Overlap mm	Length m	m ² per roll	Product code
1350	150	22.25	30	4006741
1350	150	33.44	45	4006744*

*Not available in WA

Roof Sarking & Building Membranes

Sisalation® Facing Foils



Designed for Sisalation® Facing Foils act as a water and vapour barrier (excludes perforated facing foils). Facing foils are a reflective foil laminate used for facing to glasswool blanket, formulating the Permastop®, Pink Thermal Slab and FI32 Semi Rigid product ranges.

Made from double sided reflective aluminium foil, double layered high density kraft paper. The HD option is reinforced by yarn.


Product information

- Suitable for use as a building blanket facing foil for metal deck roofing and underpinning concrete roof slabs
- Perforated option maximises the acoustic absorption properties of glasswool insulation
- Strong, tear and scratch resistant
- When used in conjunction with an airspace, it is an effective thermal insulation material
- Provides an effective vapour barrier
- Aids in the prevention of condensation

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Product	Width mm	Length m	m ² per roll	Roll weight kg	Product code
Sisalation® Heavy Duty 450 Facing Foil	1000	60	60	10.45	4005550
	1200	60	72	12.49	4021966
	1200	300	360	63.47	4022129
	1350	60	81	14.05	4021967
Sisalation® Heavy Duty Perforated 450P Facing Foil	1200	300	360	56.74	4022128
	1350	600	720	226	4021990
	1350	60	81	12.53	4022139
	1350	300	405	133.6	4021514
	1500	300	450	70.89	4021965

Installation example

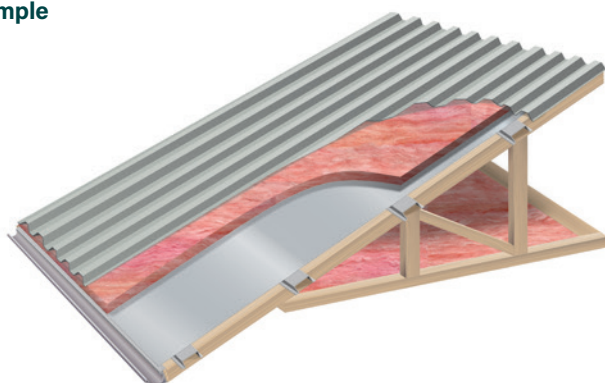

Roofing Blanket

Pink® Building Blanket



Designed for use in conjunction with the Sisalation® product range in residential and commercial metal clad roof and wall applications. Providing excellent thermal and acoustic properties by reducing heat loads entering a building. Minimising the internal reverberation and flow of unwanted nuisance noise generated from adjacent buildings/rooms and/or the external environment.

Made from up to 80% recycled glass that is lightweight, flexible and resilient.

Product information


- Meets AS 1530.1 for Non-Combustibility
- Reduces sound transfer from the external roof environment into the building (i.e. rain and overhead traffic)
- Ideal for noise control behind perforated ceilings
- Designed for all year round comfort reducing energy consumption and saving you money

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Material R-value	Thickness mm	Width mm	Length mm	m² per roll	Product code
R1.3	55	1200	25	30	4005968
	55	1200	30	36	4005966
	55	1200	33	39.6	4005967
R1.8	75	1200	25	30	4005973
R2.5	100	1200	15	18	4005980
R3.0	130	1200	10	12	4005981
R3.2	130	1200	10	12	4005983
R3.6	130	1200	6.5	7.8	4005984

Roofing Blanket

Permastop® Building Blanket

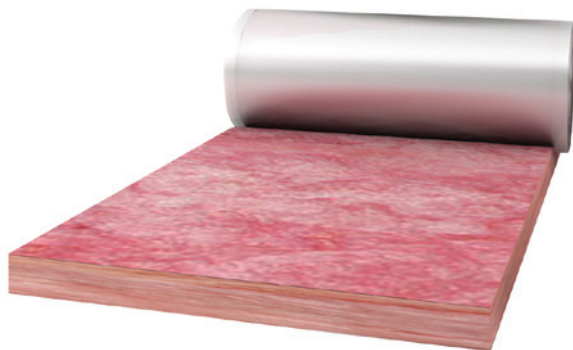

Designed for use in residential and commercial metal clad roof and Type C commercial wall applications to provide thermal, acoustic and condensation control to the building.

Made from Pink® building blanket (up to 80% recycled content) faced with Sisalation® reflective facing foil (available in Light, Medium and Heavy Duty) adhered to one side. The Sisalation reflective facing foil has 150mm overlap along the left hand side (lengthwise) for lapping the blanket.

- Combines two effective types of insulation, Pink® Building Blanket and Sisalation® Facing Foil, to offer one single product solution
- Aids in minimising the risk of condensation
- Reduces sound transfer from the external environment (i.e. rain and overhead traffic) into the building
- Year round comfort, increasing overall energy efficiency to a building
- Faced with industry leading Sisalation® reflective foil laminate in your choice of Light, Medium or Heavy Duty strength


Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply. Cut-to-length available. Please check lead times in your location.

Facing	Material R-value	Thickness mm	Width mm	Length mm	m ² per roll	Product code
Sisalation® 436 Facing Foil Light Duty (LD) 150mm lap	R1.3	55	1200	15	18	4022059
	R1.3	55	1200	20	24	4022003
	R1.4	60	1200	15	18	4022004*
	R1.4	60	1200	20	24	4022061*
	R1.8	75	1200	15	18	4022062
	R2.5	100	1200	10	12	4022007
	R3.0	130	1200	10	12	4022064
	R3.2	130	1200	10	12	4022065
Sisalation® 430 Facing Foil Medium Duty (MD) 150mm lap	R3.6	130	1200	6.5	7.8	4022010
	R1.3	55	1200	15	18	4005793
	R1.3	55	1200	20	24	4005683
	R1.4	60	1200	15	18	4004325*
	R1.8	75	1200	15	18	4005712
	R2.5	100	1200	10	12	4005719
	R3.0	130	1200	10	12	4005631
	R3.2	130	1200	10	12	4005622
Sisalation® 450 Facing Foil Heavy Duty (HD) 150mm lap	R3.6	130	1200	6.5	7.8	4005626
	R1.3	55	1200	15	18	4005614
	R1.4	60	1200	15	18	4004326*
	R1.8	75	1200	15	18	4005616
	R2.5	100	1200	10	12	4005619
	R3.0	130	1200	10	12	4005633
	R3.2	130	1200	10	12	4005625
	R3.6	130	1200	6.5	7.8	4005627

*Available in QLD only

Roofing Blanket

Permastop® Tropic Building Blanket

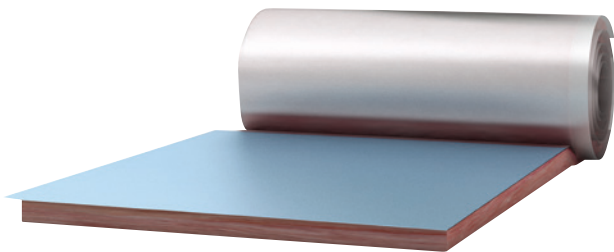

Designed for use in Australia's hot and humid tropical regions in residential and commercial metal clad roof to provide greater condensation protection, while also providing excellent thermal and acoustic benefits for the building.

Made from Pink® building blanket faced with Sisalation® foil on both sides. An anti-glare tropic facing on one side (top) and a reflective facing foil laminate on the underside.

Product information

- Aids in minimising the risk of condensation for Australia's northern tropical climates
- Reduces sound transfer from the external roof environment into the building (i.e. rain and overhead traffic)
- Year round comfort increasing overall energy efficiency to a building
- Faced with industry leading Sisalation® reflective foil laminate
- The layer of Sisalation® incorporates a 150mm overlap positioned in an alternating configuration

Product stock and availability: Available in North Queensland Region only. Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Facing	Material R-value	Thickness mm	Width mm	Length mm	m² per roll	Product code
Double-sided Sisalation® Facing Foil	R1.4	60	1200	15	18	4004329
Light Duty (LD) 150mm lap	R1.8	75	1200	15	18	4004225

Roofing Blanket

Resituff™ Building Blanket



Designed for use in residential metal clad roofing. It provides thermal and acoustic properties by reducing heat loads entering a building and minimising the internal reverberation and flow of unwanted nuisance noise generated from adjacent buildings and/or the external environment.

Made from Pink® Building Blanket (up to 80% recycled content) faced on one side with Sisalation® Multipurpose Light Duty (431) polyweave reflective foil laminate and features a 150mm foil overlap along the left-hand side edge (lengthwise) for lapping the blanket.

Product information

- Not suitable for exposed wall applications. Please refer to the Permastop® product.
- Aids in minimising the risk of condensation in homes
- Features puncture resistant Sisalation® reflective polyweave backing
- Reduces sound transfer from the external roof environment into residential homes (i.e. rain and overhead traffic).

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Facing	Material R-value	Thickness mm	Width mm	Length m	m ² per roll	Product code
Sisalation® Multipurpose LD (431) 150mm lap	R1.3	55	1200	15	18	4020341
		55	1200	20	24	4020342
	R1.4	60	1200	15	18	4020343*
		60	1200	20	24	4020344*
	R1.8	75	1200	15	18	4020345

*Available in QLD only

Roofing Blanket

Permatuff™ Building Blanket



Designed for use in commercial metal roofing. Providing thermal and acoustic properties by reducing heat loads entering a building. Minimising the internal reverberation and flow of unwanted nuisance noise generated from adjacent buildings and/or the external environment.

Made from Pink® Building Blanket (up to 80% recycled content) faced on one side with Sisalation® Multipurpose MD (432) and EHD (456) polyweave reflective foil laminate and features a 150mm foil overlap along the left-hand side edge (lengthwise) for lapping the blanket.

Product information

- Not suitable for exposed wall applications. Please refer to the Permastop® product.
- Aids in minimising the risk of condensation
- Features a strong, puncture resistant Sisalation® reflective polyweave backing
- Reduces sound transfer from the external roof environment into the building (i.e. rain and overhead traffic)
- Year round comfort increasing overall energy efficiency to a building


Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Facing	Material R-value	Thickness mm	Width mm	Length mm	m ² per roll	Product code
Sisalation® Multipurpose MD (432) 150mm lap	R1.3	55	1200	15	18	4020322
		55	1200	20	24	4020323
	R1.4	60	1200	15	18	4020324*
		60	1200	20	24	4020325*
	R1.8	75	1200	15	18	4020326
	R2.5	100	1200	10	12	4020327
	R3.0	130	1200	10	12	4020328
	R3.2	130	1200	10	12	4020329
Sisalation® Multipurpose EHD (456) 150mm lap	R1.3	55	1200	15	18	4005960
		55	1200	20	24	4005965
	R1.8	75	1200	15	18	4005961

*Available in QLD only

Roofing Blanket

Pink® EmberGuard® Building Blanket

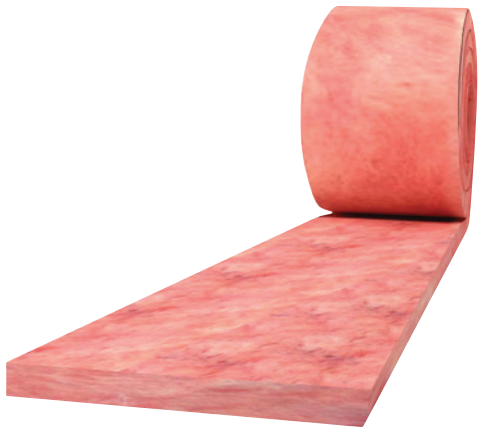

Designed for use under metal and tiled roofing materials in residential constructions. Ideal for use as a gap seal in roofs of buildings in bush fire prone areas. It is recommended to be installed in conjunction with Sisalation® Multipurpose EHD (456), Sisalation® Vapawrap® Vapour Permeable Metal Roof or Sisalation® Metal Roof MD (433) or HD (453).

Made from up to 80% recycled content that is lightweight, flexible and resilient.


Product information

- Non-combustible in accordance with AS1530.1-1994 reducing fire risk
- For use in bushfire prone areas with a Bushfire Attack Level (BAL) of 12.5-40 (Ember Attack)
- Cost effective regulatory compliant solution providing peace of mind against ember attack

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Thickness mm	Width mm	Length m	Rolls per pack	Lineal m ² per pack	Product code
25	300	20	4	80	4005985

Install example

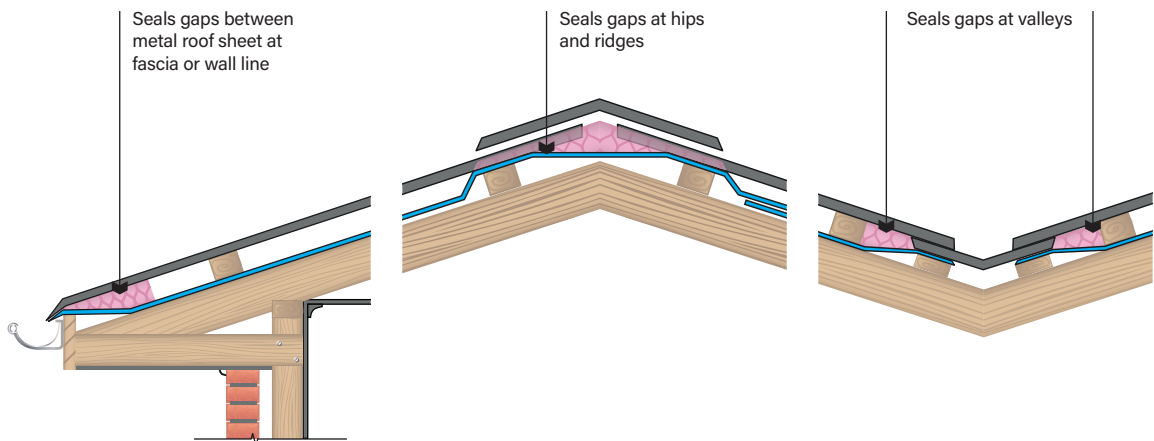

Ceiling Insulation

Pink® Batts: Ceiling



Designed for thermal insulation of ceilings in low rise commercial building applications including schools, universities, aged care and child care buildings. It is the trusted choice when it comes to constructing new homes or retrofitting existing buildings.

Made from lightweight, flexible and resilient up to 80% recycled glass.

Product information

- Codemark Certified for AS 4859.1 Thermal Performance
- Non-combustible in accordance with AS/NZS 1530 Part 1
- Recover to their nominal thickness, fast
- Batts are friction fitted and will remain in place without slumping for continual thermal performance
- Comfortable to handle during installation
- Safe to use with allergy sufferers due to low VOC

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Frame type	Material R-value	Thickness mm	Width mm	Length mm	m ² per pack	Coverage per pack m ²	Batts per pack	Packs per bale	Product code
Timber	R2.5	130	430	1160	7.98	8.86	16	6	4006098
		130	580	1160	10.76	11.95	16	6	4006099
	R3.0	155	430	1160	7.98	8.86	16	5	4006100
		155	580	1160	10.76	11.95	16	5	4006101
	R3.5	175	430	1160	7.98	8.86	16	4	4006102
		175	580	1160	6.73	7.47	10	6	4006103
	R4.1	215	430	1160	4.99	5.61	10	5	4006039*
		215	580	1160	6.73	7.47	10	6	4006040*
	R5.0	220	430	1160	3.99	4.43	8	5	4006041
		220	580	1160	5.38	5.97	8	5	4006042
	R6.0	250	430	1160	2.99	3.32	6	5	4006043
		250	580	1160	4.04	4.48	6	5	4006044
Steel	R4.1	215	450	1200	5.4	5.4	10	3	4020596*
		215	600	1200	7.2	7.2	10	6	4020597*
	R5.0	220	450	1200	4.0	4.0	8	5	4020598
		220	600	1200	5.4	5.4	8	5	4020599
WA Only	R4.1	195	430	1160	7.48	8.41	15	5	4020917^
		195	580	1160	8.74	9.83	13	5	4021173^

*These products may not be available in WA. Please contact Fletcher Insulation for confirmation.

^These product codes are only available in WA and **do not have Codemark certification**. Refer to codes above for all other states.

Ceiling Insulation

Pink® SonoMatt Blanket®



Designed for use in multiple applications such as partitions, screens, baffles and ceiling overlays for effective sound absorption particularly for 'problem' acoustic applications unsolved by more routine acoustic products. Due to its lightweight black matt tissue facing its ideal to conceal imperfections behind perforated linings, while improving the overall aesthetic appearance of the internal lining.

Made from Pink® glasswool building blanket substrate faced with black matt tissue adhered to one side.


Product information

- Codemark Certified for AS 4859.1 Thermal Performance
- Faced with an aesthetically pleasing black finish
- Excellent fire performance
- Exceptional acoustic performance, ideal for providing privacy between offices, boardrooms, shops etc
- Provides the added benefit of thermal insulation to improve the energy efficiency of a building
- Manufactured from up to 80% recycled glass
- Resistance to bacteria and micro-organism growth

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Material R-value	Thickness mm	Width mm	Length mm	m ² per roll	Product code
R1.3	55	1200	20	24	4005597
R1.8	75	1200	15	18	4005598
R2.5	100	1200	15	18	4005599
R3.0	130	1200	12	14.4	4005265

Installation example Underslab with suspended perforated ceiling application

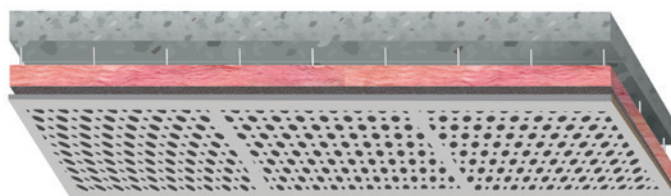

Roofing Ancillary

Safety Mesh



Designed for use in a variety of applications such as factories, warehouse, shopping centres, schools, office blocks and sheds to provide fall protection for roof installers and offers long-term fall protection for maintenance and repair workers.

Made from high quality, galvanised steel wire.

Product information

- Uniform strength and consistent quality over the length of the mesh
- Complies with the requirements of AS/NZS 4389

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Product	Width mm	Length mm	Wire diameter mm	Mesh size mm	Product code Excluding NSW & QLD	Product code NSW & QLD
Galvanised	1800	50	2	300 x 150	4006765 (Roofsafe®)	4010451 (Roof Bloc)

Product	Width mm	Length mm	Wire diameter mm	Mesh size mm	Product code
Galvanised CTL	1800	50	2	300 x 150	4006768 (Roof Bloc)
	2250	50	2	300 x 150	4006769 (Roof Bloc)

Roofing Ancillary

Roof Razor®



Designed for use in commercial metal roof system applications. The insulation spacer sits between the roof structure and the external cladding membrane to create the space required for insulation blanket to recover to its full nominal thickness between purlins.

Made from high tensile galvanised steel.

Product information


- Satisfies NCC, Section J Energy Efficiency Provisions
- Suitable product option for use in cyclonic regions
- Impressive national reputation built on ease and speed of installation
- Suitable for use on roofs with a pitch up to and including 30°C
- Compatible with both pierced and concealed fix roof cladding
- 1200mm length to match typical Permastop® Building Blanket width, allowing for a direct line of sight to the purlin
- Cuts through insulation to give a direct connection to the purlin, ensuring that over time the bracket will not loosen as a result of vibration and movement

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Product	Height mm	Length mm	Pieces per pack	LM per pack	Product code
Roof Razor® pre-loaded screws	60	1200	6	7.2	4006606
	85	1200	6	7.2	4006601
	115	1200	6	7.2	4006602
Roof Razor® timber roof without screws (for fixing to timber battens)	85	1200	6	7.2	4006604
	115	1200	6	7.2	4006605
Roof Razor® metal roof cyclonic pre-loaded screws	60	1200	6	7.2	4006607
	85	1200	6	7.2	4005301
	115	1200	6	7.2	4006603
Roof Razor® metal roof cyclonic without screws	115	1200	6	7.2	4005302

Acoustic Barriers

Quadzero™ Loaded Vinyl Barrier

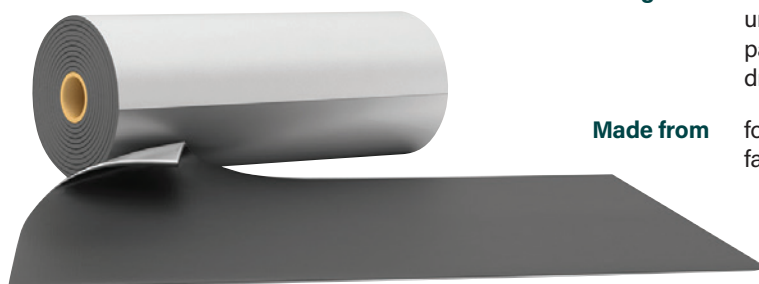

Designed for use in applications where space may be limited to reduce unwanted noise transmission through ceilings, walls, floors, office partitions, machinery enclosures and/or ductwork. Can also be draped to make portable acoustic curtains and screens.

Made from foil faced, heavy mass-loaded vinyl noise barrier with a reinforced fabric backing.

Product information

- Easy to cut and fabricate around pipe penetrations, ducting and cabling
- High tensile strength, resistant to tearing
- Free from lead, odour-producing oils and bitumen
- Excellent fire hazard properties
- Easy to cut, sew and mechanically fasten into position
- Resistant to most chemicals, solvents and petrol
- Safe to use with allergy sufferers due to low VOC
- Reduces sound transfer from the external roof environment into the building (i.e. rain and overhead traffic)
- Ideal for home theatre rooms, office partitions and meeting rooms
- Can be wrapped around noisy pipes, i.e. fluid or gas pulsation in chemical, petrochemical and waste water treatment plants
- Can be laminated onto lightweight structures to dampen vibration and reduce airborne noise

Product stock and availability: Lead times will apply. Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Barrier weight kg/m ²	Thickness mm	Width mm	Length m	m ² per roll	Roll weight kg	Rolls per pallet	Product code
4	2.0	1350	5	6.7	27	20	4006763
6	3.0	1350	5	6.7	41	20	4006761
8	4.0	1350	5	6.7	54	30	4006762

Acoustic Barriers

Soundlag 4525C Pipe Acoustic Lagging



Designed for use around ducts, rainwater or waste pipes to reduce noise levels in residential and multi-residential buildings.

Made from reinforced aluminium foil skin applied to a 5kg/m² flexible loaded vinyl barrier backed with 25mm thick convoluted, hydrolysis resistant, acoustic foam.

Product information


- Maximises noise control by providing high sound absorption (reverberation control) and superior transmission loss
- Highly flexible, allowing it to conform to the smallest diameter pipes & bends (has no memory)
- Conforms well to corners and irregular surfaces
- Broad operating temperature range; max 100°C
- High resistance to heat flow (i.e. low thermal conductivity)
- Reduces the noise in hydraulic and waste pipes by up to 25dB(A)
- Easy to cut and install into tight applications

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location. Minimum order quantities may apply.

Barrier weight kg/m ²	Thickness mm	Width mm	Length m	m ² per roll	Roll weight kg	Rolls per pallet	Product code
5	25	1350	5	6.70	30	50	4006764
5	25	1350	3	4.05	21	30	4023129*

*Available in Queensland only.

Acoustic example Water waste pipe

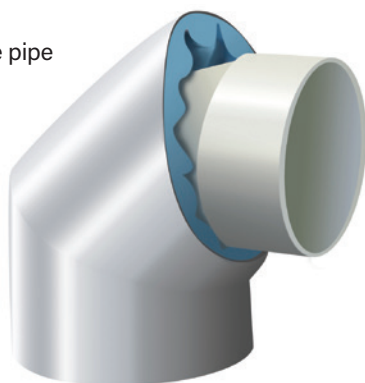

Tapes

Vapastop® 883 Reinforced Foil Tape

Designed for use with Sisalation® products to create a vapour sealed join.

Made from laminated polyethylene film, polyethylene fibre mesh and aluminium foil.



Width mm	Length m	Rolls per carton	Product code
48	50	24	4006794
63	50	16	4006798
72	50	16	4006799
96	50	12	4006800
120	50	8	4004745
144	50	8	4006806

Plain Foil Tape



Designed for use with Sisalation® products to create a vapour sealed join.

Made from dead soft aluminium foil with synthetic rubber/resin on one side.

Width mm	Length m	Rolls per carton	Product code
48	50	24	4006802
72	50	16	4006803
96	50	12	4006804

Sisalation® VapaSeam™ Tape



Designed for air-tight bonding and sealing of penetrations and overlaps of rigid and flexible air and vapour barriers.

Made from a single sided easy tear woven PE with an aggressive, moisture resistant polyacrylate pressure sensitive adhesive with superior aging resistance.

Width mm	Length m	Rolls per carton	Product code
50	50	30	4022606

3M Seaming Tape



Designed for use with vapour permeable membranes, when joining membranes to avoid moisture ingress at the seams.

Made from white polypropylene, with an acrylic pressure sensitive adhesive.

Width mm	Length m	Rolls per carton	Product code
48	50	24	4006809

Product stock and availability: Please check stock availability with your local Fletcher Insulation representative. Product stock varies and not all products are stocked in every Fletcher Insulation location.

Compliance and Design Assistance

Technical Data Sheets and Installation Guidelines

Visit insulation.com.au to discover the excellent array of technical information available to download, whether you need to get into the product details yourself, or reassure the project team that our products are compliant, and safe and easy to install.



Technical support

Fletcher Insulation's Technical Service is an invaluable resource for architects and specifiers. Our insulation experts understand what's needed to satisfy a diverse range of building applications, including the complex requirements of the education and health sectors. Providing the right advice when you need it, our technical service team has quality solutions to help solve your building insulation challenges.

Contact Fletcher Insulation on 1300 654 444 or email technical@insulation.com.au

Get in touch with us

With one of Australia's widest distribution and sales coverage networks, Fletcher Insulation is ready to assist you.



For more information:

phone **1300 654 444**

email **info@insulation.com.au**

visit **insulation.com.au**

© Fletcher Insulation Pty Limited 2026. Fletcher Insulation reserves the right to change product specifications without prior notification. Information in this publication and otherwise supplied to users as to the subject product is based on our general experience and is given in good faith, but because of the many particular factors which are outside our knowledge and control and affect the use of products, no warranty is given or is to be implied with respect to either such information or the product itself, in particular the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended application. The colour PINK, Pink® and Pink® Batts are registered trademarks of Owens Corning used under licence by Fletcher Insulation. FBS-1 Glasswool Bio-Soluble Insulation® is a registered trademark of ICANZ. Unless otherwise stated all ™ and ® are trademarks and registered trademarks of Fletcher Insulation Pty Limited ABN 72 001 175 355. BR003_Revision_9_Issue Date 29092026.

Building Better, Together

phone **1300 654 444**
email **info@insulation.com.au**
visit **insulation.com.au**